


# D Series

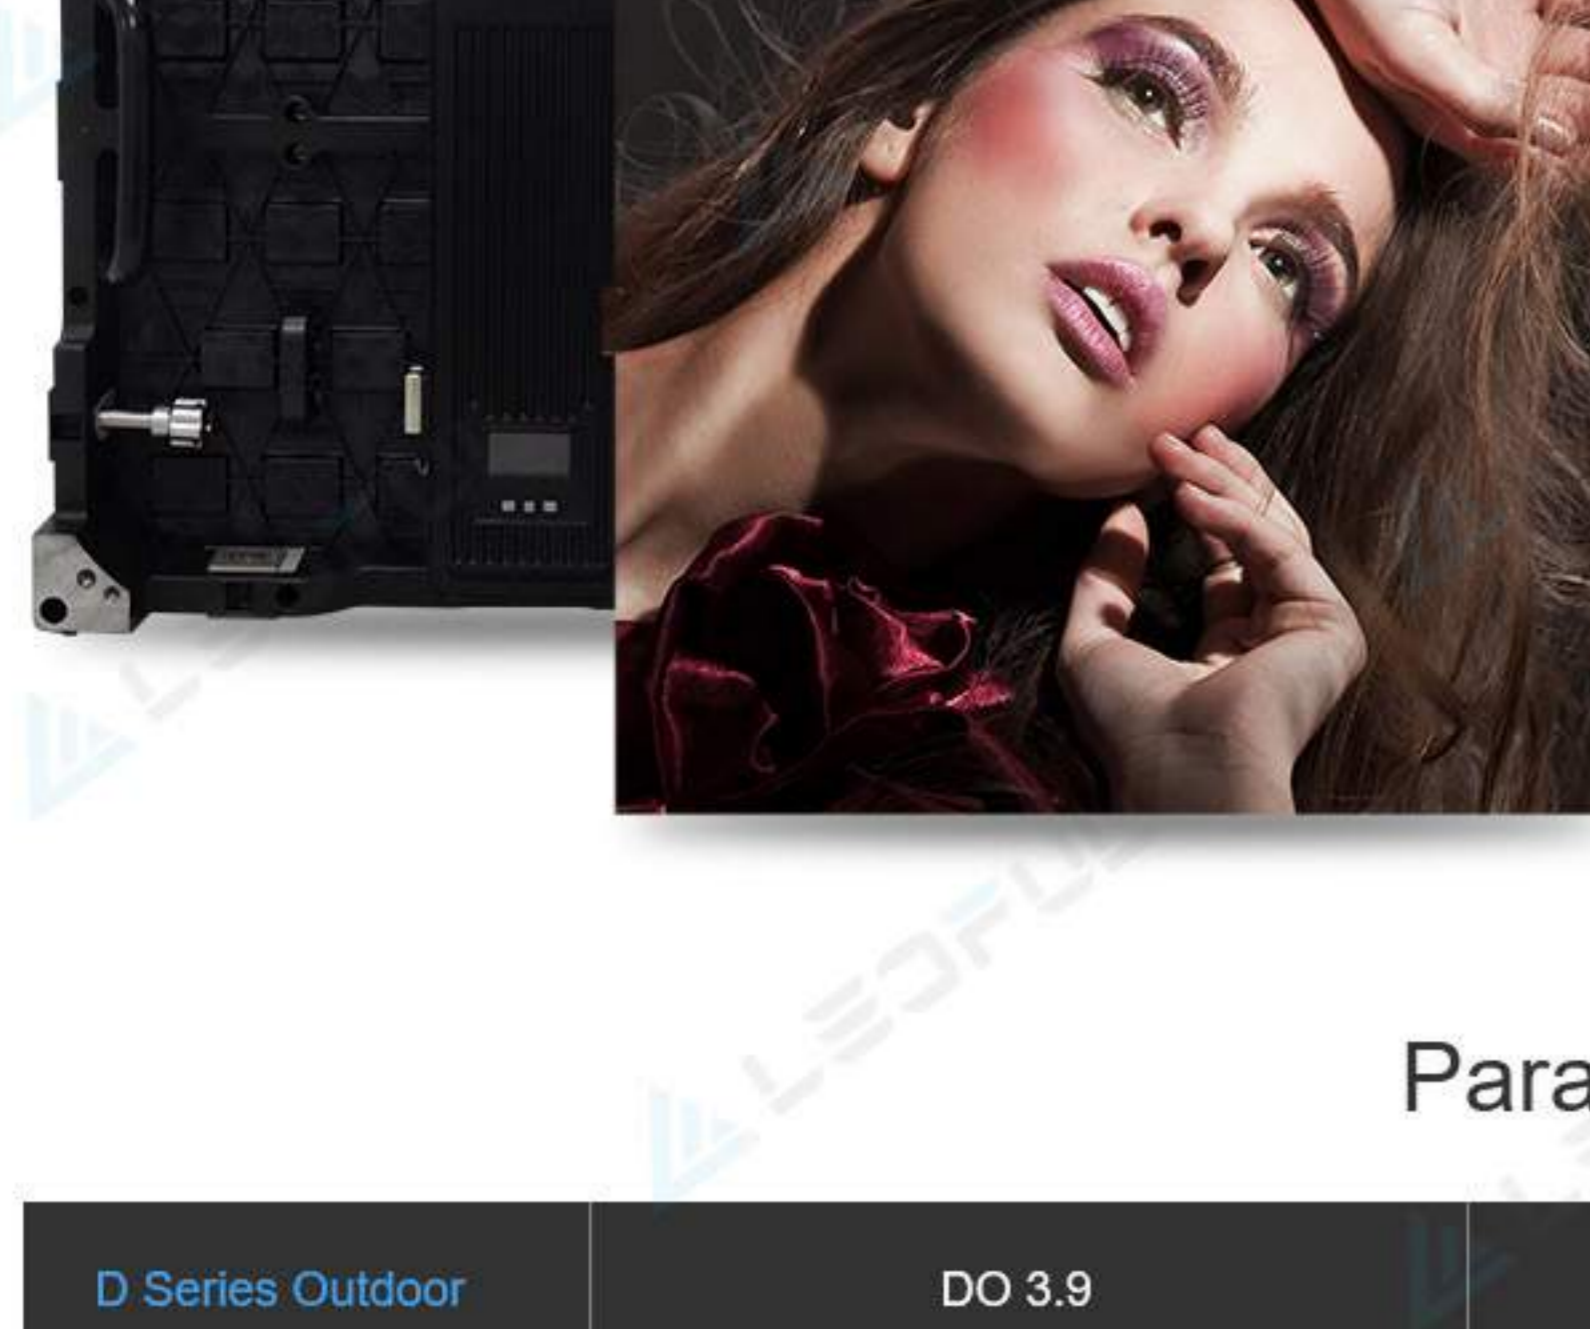

DI2.9 | DI3.9 | DI4.8 | LI5.9

DO3.9 | DO4.8 | LO5.9

- ✦ Front Maintenance
- ✦ Edge-care Design
- ✦ No Light Leakage
- ✦ Light and Thin

## Parameter

D Series Outdoor	DO 3.9	DO 4.8	DO 5.9
Pixel Pitch(mm)	3.91mm	4.81mm	5.95mm
Pixel Matrix Per Sq.m	65536	43264	28224
Pixel Configuration	SMD1921	SMD2727/1921	SMD2727
Brightness (nits)	≥6500	≥5500	≥6500
Scan	1/8	1/13	1/7
Cabinet Resolution	128x128	104x104	84x84
Power Con. (Max / Avg)	880/280 w/sq.m	800/240 w/sq.m	720/240 w/sq.m
Cabinet Weight	7.85kg / 17.3lb	7.7kg / 16.98lb	7.2kg / 15.87lb
Refresh Rate (HZ)	3840	3840	1920
Module Dimension	250x250mm / 0.82x0.82feet		
Cabinet Dimension	500x500x85mm / 1.64x1.64x0.28feet		
Cabinet Material	Die-casting Aluminum		
Service Access	Front / Rear		
Grey Scale (bit)	14		
Viewing Angle (H/V)	140 / 140		
IP Rate	IP65		
Input Voltage (AC)	110 / 240		

Specifications and photos are subject to change without prior notice.

D Series Indoor	DI 2.9	DI 3.9	DI 4.8	DI 5.9
Pixel Pitch(mm)	2.976mm	3.91mm	4.81mm	5.95mm
Pixel Matrix Per Sq.m	112896	65536	43264	28224
Pixel Configuration	SMD1515	SMD2121	SMD2121	SMD3528
Scan	1/28	1/16	1/13	1/14
Cabinet Resolution	168x168	128x128	104x104	84x84
Cabinet Weight	8kg / 17.6lb	7.4kg/16.3lb	7.3kg/16.09lb	7kg/15.43lb
Power Con. (Max / Avg)	640 / 200w/sq.m	620 / 180w/sq.m	600 / 170w/sq.m	600 / 170w/sq.m
Refresh Rate (HZ)	3840	3840	1920	1920
Cabinet Material	Die-casting Aluminum			
Module Dimension	250x250mm / 0.82x0.82feet			
Cabinet Dimension	500x500x85mm / 1.64x1.64x0.28feet			
Service Access	Front / Rear			
Brightness (nits)	1200			
Grey Scale (bit)	16			
Viewing Angle (H/V)	140 / 140			
IP Rate	IP43			
Input Voltage (AC)	110 / 240			

Specifications and photos are subject to change without prior notice.



## Front Maintenance

The magnet LED modules can be dismantled by tools on front side.




## Edge-care Design

4mm stands at the bottom of cabinet, prevent edge pixels damage when put cabinet upright on the ground.



## Ultra Fast Response

The response speed exceeds the response limit of the naked eyes, while playing the high speed dynamic images in an LED Screen, it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

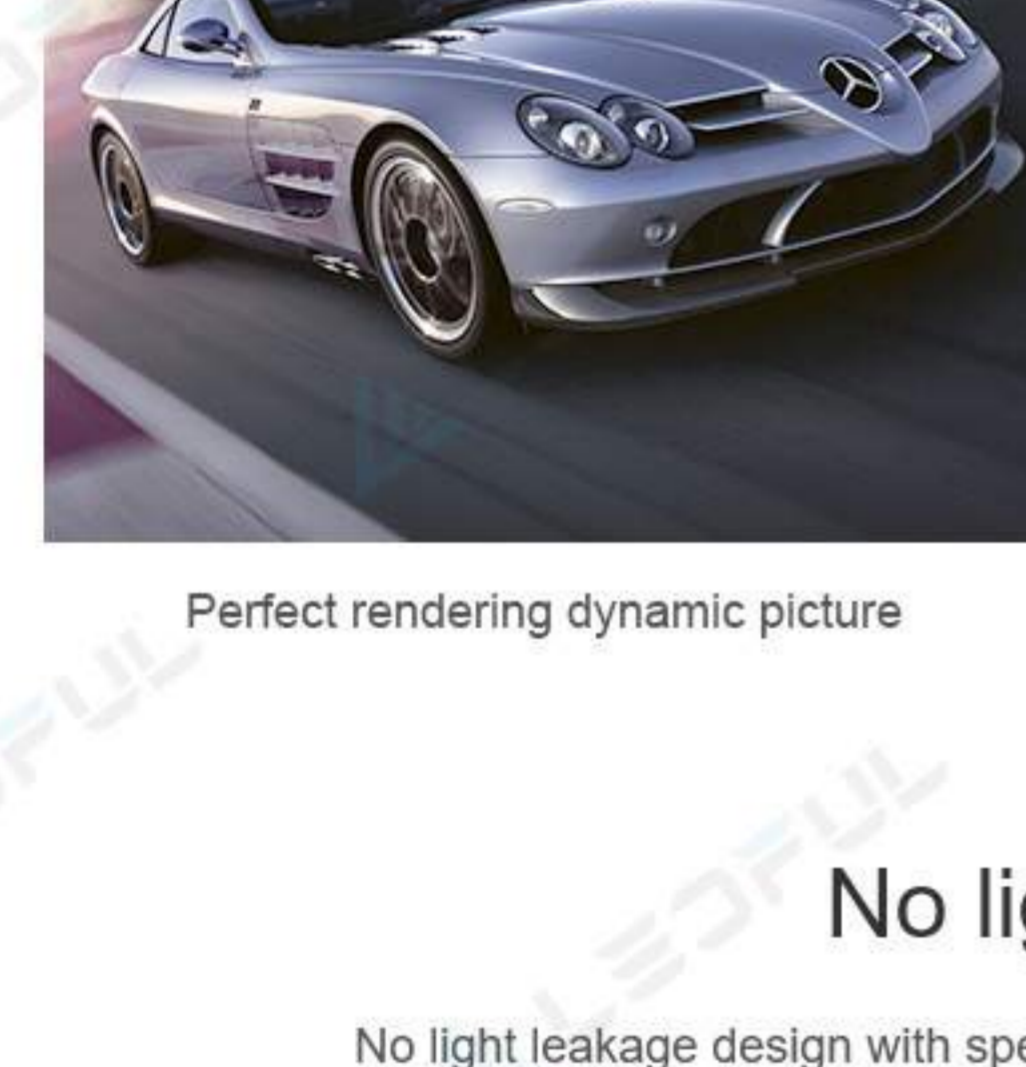

Perfect rendering dynamic picture



Smear, Ghosting phenomenon


## No light leakage trouble

No light leakage design with specific strips on side of cabinet and behind neighbour module.



## Wide Viewing Angle

Both 160° from horizontal & vertical for the viewing angle. Seeing from five directions, it would be still the natural and clear image in an LED display.

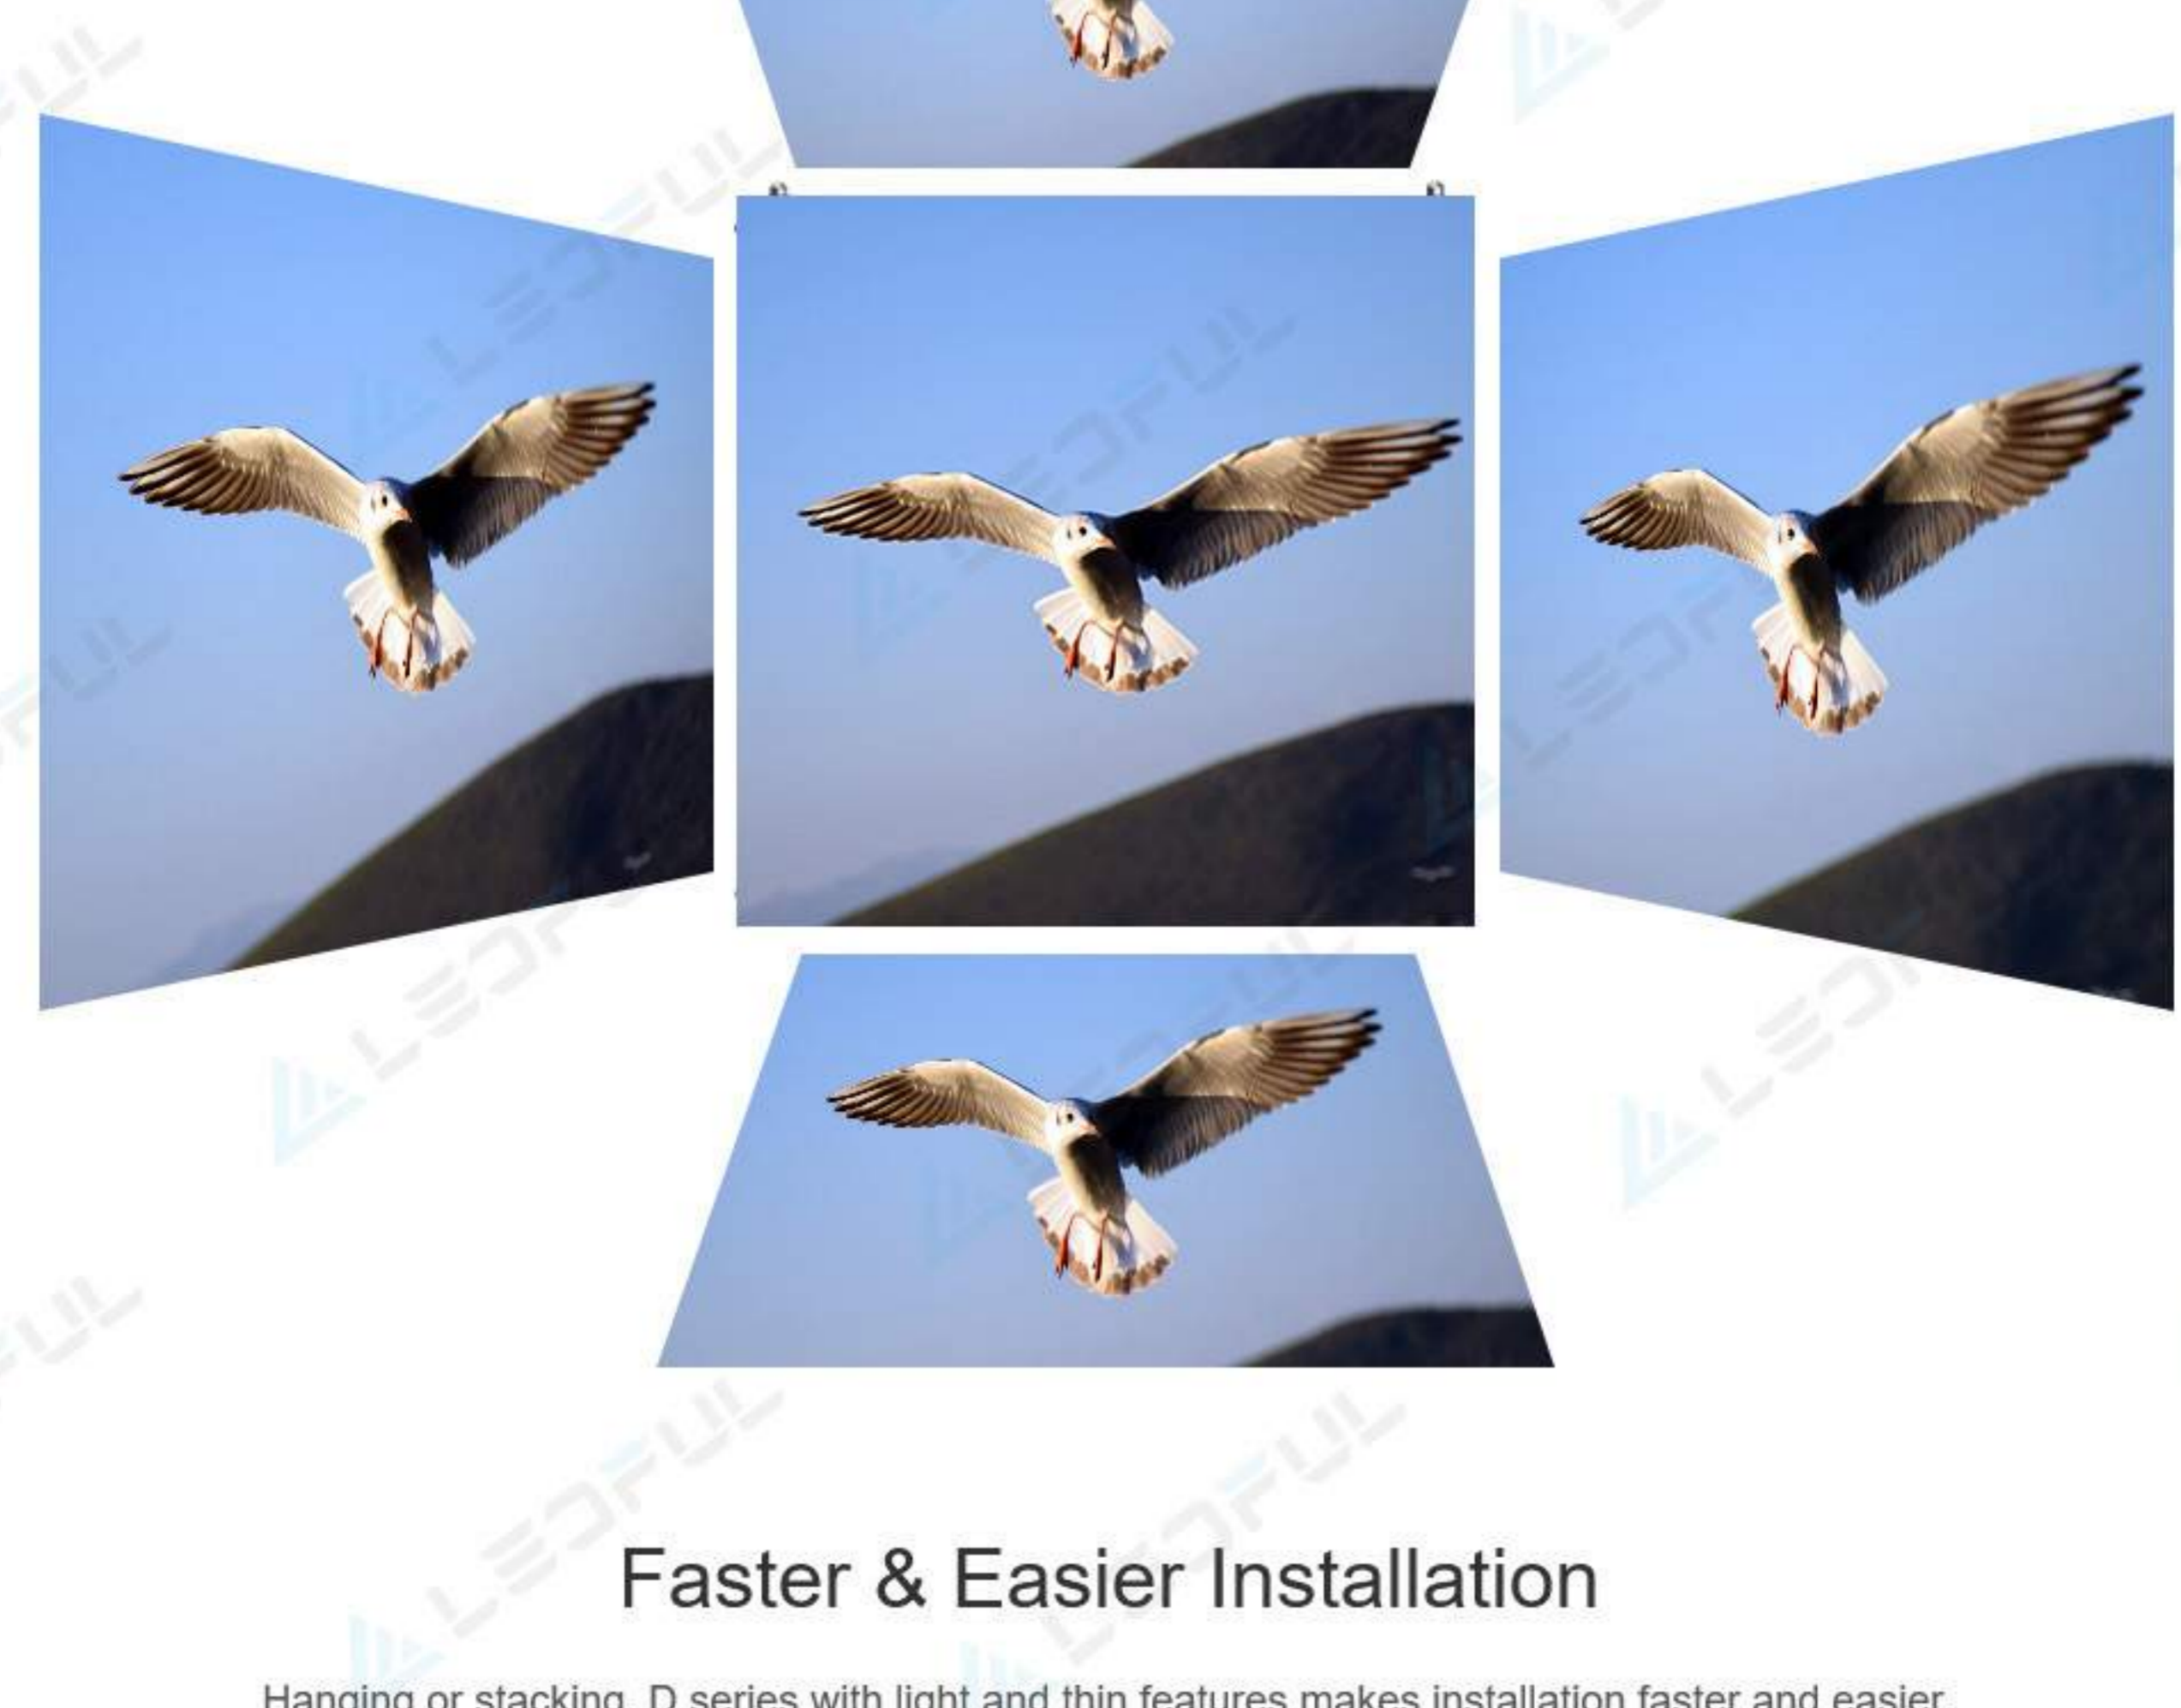

## Faster & Easier Installation

Hanging or stacking, D series with light and thin features makes installation faster and easier.



## Accessories

