LEDFUL

K Series

KI2.6 | KI2.8 | KI2.9 | KI3.9 | KI4.8 | KI5.9 | KI6.2

KO3.9 | KO4.8 | KO5.9 | KO6.2

- ☆ Full Front Maintenance
- ☆ Curved Installation
- ☆ Cable Free Connection
- ☆ No Light Leakage
- ☆ Light and Thin

Parameter

LEDFUL

K Series Outdoor	KO 3.9	KO 4.8	KO 5.9	KO 6.2
Pixel Pitch(mm)	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	65536	43264	28224	25600
Pixel Configuration	SMD1921	SMD2727	SMD3535	SMD3535
Brightness (nits)	≥4000	≥4500	≥4500	≥4000
Scan	1/16	1/13	1/7	1/10
Cabinet Resolution	128×128	104×104	84×84	80×80
Power Con. (Max / Avg)	750 / 200 w/sq.m	700 / 220 w/sq.m	700 / 200 w/sq.m	680 / 190 w/sq.m
Module Dimension	250x250mm / 0.82x0.82ft			
Cabinet Dimension	500x500x87mm / 1.64x1.64x0.29ft			
Cabinet Weight	8kg / 17.6lb ((Die-casting Aluminum)			
Service Access	Front / Rear			
Rotation Angle	-10° and +10°			
Refresh Rate (HZ)	1920			
Grey Scale (bit)	16			
Viewing Angle (H/V)	160 / 160			
IP Rate	IP65			
Input Voltage (AC)	110 / 240			

* Specifications and photos are subject to change without prior notice.

K Series Indoor	KI 2.6	KI 2.8	KI 2.9	KI 3.9	KI 4.8	KI 5.9	KI 6.2
Pixel Pitch(mm)	2.604mm	2.84mm	2.976mm	3.91mm	4.81mm	5.95mm	6.25mm
Pixel Matrix Per Sq.m	147456	123904	112896	65536	43264	28224	25600
Pixel Configuration	SMD2121	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528	SMD3528
Scan	1/32	1/22	1/28	1/16	1/13	1/7	1/10
Cabinet Resolution	192×192	176×176	168×168	128×128	104×104	84×84	80×80
Power Con. (Max / Avg)	800/250w/sq.m	780/240w/sq.m	760/230w/sq.m	740/220w/sq.m	720/210w/sq.m	700/200w/sq.m	700/200w/sq.m
Module Dimension	250x250mm / 0.82x0.82ft						
Cabinet Dimension	500x500x87mm / 1.64x1.64x0.29ft						
Cabinet Weight	8kg / 17.6lb ((Die-casting Aluminum)						
Service Access	Front / Rear						
Rotation Angle	-10° and +10°						

Brightness (nits)	≥1000
Refresh Rate (HZ)	3840
Grey Scale (bit)	16
Viewing Angle (H/V)	160 / 160
IP Rate	IP31
Input Voltage (AC)	110 / 240

* Specifications and photos are subject to change without prior notice.

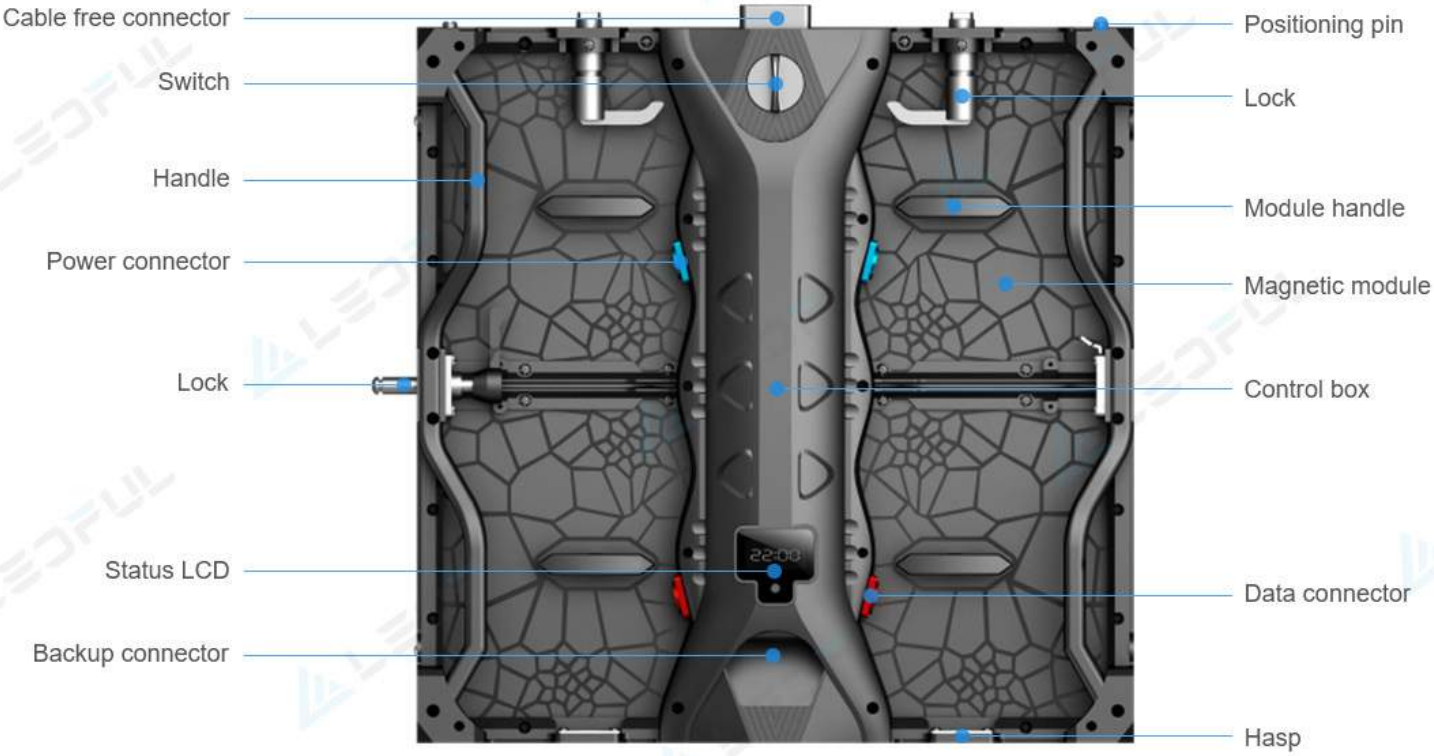

Full Front Maintenance

LED modules, power supply, receiver card, hub card, cables are all front service.



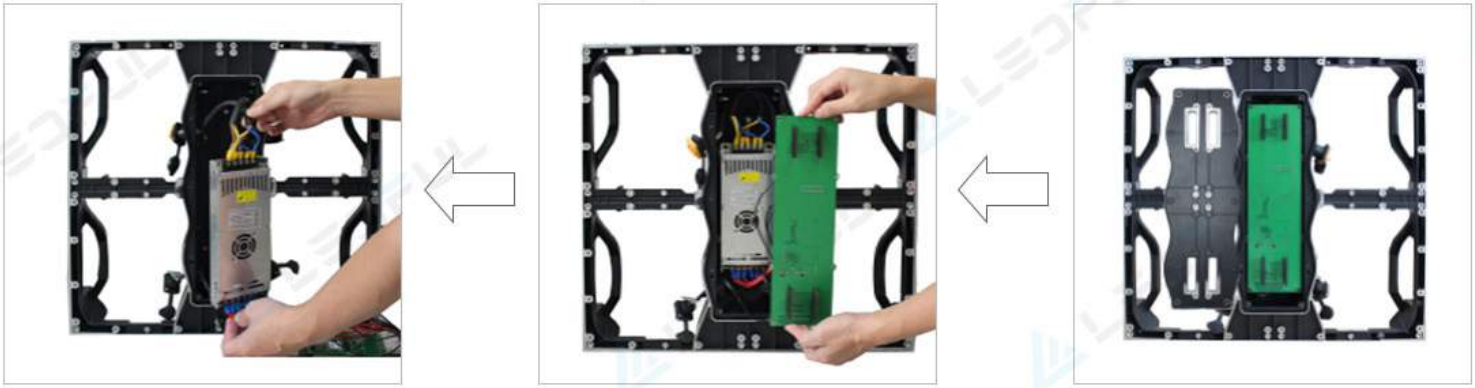

Quick Exchangeable Control Box For Easy Maintenance

Curved Installation

Curved with every 2.5° between -10°and 10°, which can make convex and concave.

Ultra Fast Response

The response speed exceeds the response limit of the naked eyes,
while playing the high speed dynamic images in an LED Screen,
it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

Perfect rendering dynamic picture

Response speed

Smear, Ghosting phenomenon

Cable Free Connection

Installation without cable connection will save much more time

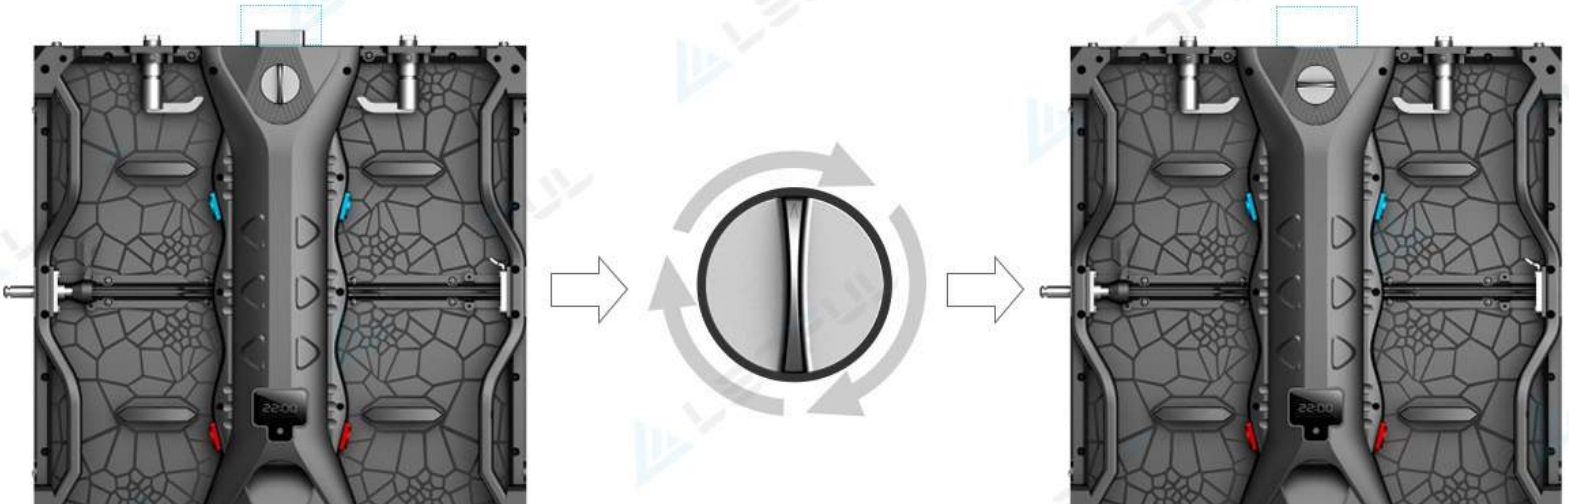

No light leakage trouble

No light leakage design with specific strips on side of cabinet and behind neighbour module.



Wide Viewing Angle

Both 160° from horizontal & vertical for the viewing angle.

Seeing from five directions, it would be still the natural and clear image in an LED display.

LEDFUL

Faster & Easier Installation

Hanging or stacking, K series with light and thin features makes installation faster and easier.

Accessories

Power Cable

Data Cable

Main Power Cable

Main Data Cable

Controller &Processor

Front Maintenance Tool

Curved Lock

Hanging Bar

LEDFUL

sales@LEDFUL.com

+86-135-30172435

www.LEDFUL.com